


QSFP+ Passive Copper Assemblies

Siemon QSFP+ Copper Cable assemblies were developed for high-density applications, offering a cost-effective, low-power option for high-speed data center interconnects. The QSFP+ form factor (Quad SFP+) can replace up to four standard SFP+ connections, providing greater density and reduced system cost. The direct-attach assemblies support emerging 40 Gb/s applications and are available in standard lengths up to 5 meters with longer custom lengths available.

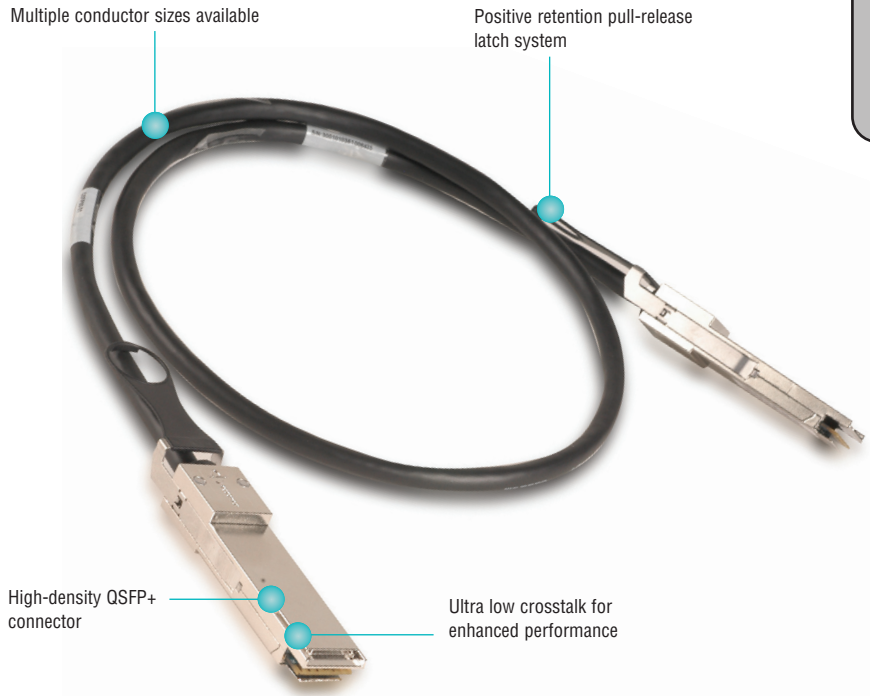


STANDARDS COMPLIANCE

- Electrical: IBTA V2 Revision 1.3, IEEE 802.3ba
- SFF-8436, SFF-8636
- RoHS

APPLICATIONS

- InfiniBand 4X SDR, DDR, QDR
- Ethernet 10G,40G
- Fiber Channel 10G,40G, SAN
- RapidIO
- Myrinet 40G
- Rack-to-Rack, Shelf-to-Shelf Interconnect
- Networking
- Storage
- Hubs, switches, routers, servers

PCB Termination

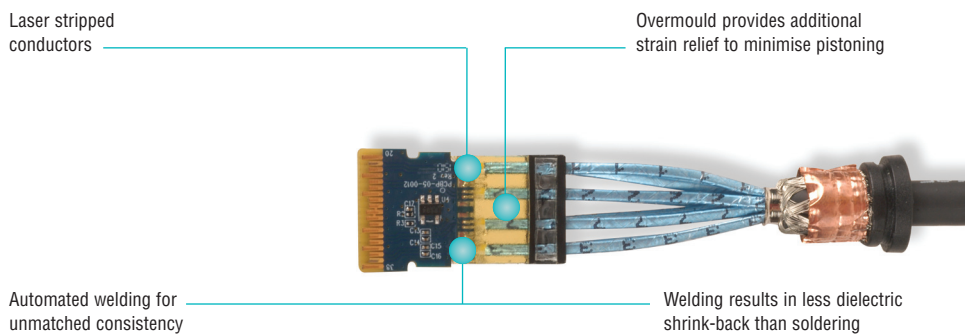

Product Information

PERFORMANCE SPECIFICATIONS

Electrical	
Min. Dielectric Withstand Voltage	300 VDC
Insulation Resistance	1000 Mohms
Current Rating	0.5 Amp Min/Signal Contact
General	
Operating Temperature	0 to 70° C
Flammability Rating (Plastics)	UL 94
Green Features	RoHS, Lead-Free
Shield	Braid/Foil
Marking	Mfg Name, Part#, Date Code

Ordering Information:

QSFP+ to QSFP+ Passive Copper Cable Assemblies

Part Number	Length	Gauge
QSFP30-00.5	0.5m	30
QSFP30-01	1m	30
QSFP30-01.5	1.5m	30
QSFP30-02	2m	30
QSFP30-02.5	2.5m	30
QSFP30-03	3m	30
QSFP26-05	5m	26

Maximum Lengths

Gauge	IBTA DDR	IBTA QDR ¹	IEEE 802.3ba
30	5m	3m	3m
28	7m	4m	4m
26	8m	5m	5m

¹ Per IBTA cable MOI V0.69: -13dB @5GHz

Note: Contact Customer Service for additional lengths.

**Worldwide Headquarters
North America**
Watertown, CT USA
Phone (1) 860 945 4200 US
Phone (1) 888 425 6165

**Regional Headquarters
EMEA**
Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

**Regional Headquarters
Asia/Pacific**
Shanghai, P.R. China
Phone (86) 21 5385 0303

**Regional Headquarters
Latin America**
Bogota, Colombia
Phone (571) 657 1950

**Siemon Interconnect
Solutions**
Watertown, CT USA
Phone (1) 860 945 4213 US
www.siemon.com/SIS

Plug	
Backshell Material	Nickel Plated Zinc Diecast
Contact Material	PCB with Gold-Plated Pads
Plastic Material	PA66
Latch	Positive Latching w/Pull Tab
Insertion Force	40N Max
Withdrawal Force	30N Max
Retention Force	90N Min
Durability	250 Cycles
Tightest Recommended Vertical Spacing (Belly to Belly)	11.80 mm Center to Center
Tightest Recommended Vertical Spacing (Stacked)	17.50 mm Center to Center
Cable	
Conductor	Solid
Wire Gauge	30 AWG to 24 AWG
Impedence	100 +/- 5 ohms
Construction	Twinaxial
Cable OD	30 AWG = 6.50mm
	28 AWG = 7.49mm
	26 AWG = 8.61mm
Jacket Type	PVC
Bend Radius	5X Cable OD -Single 10X Cable OD - Repeated