
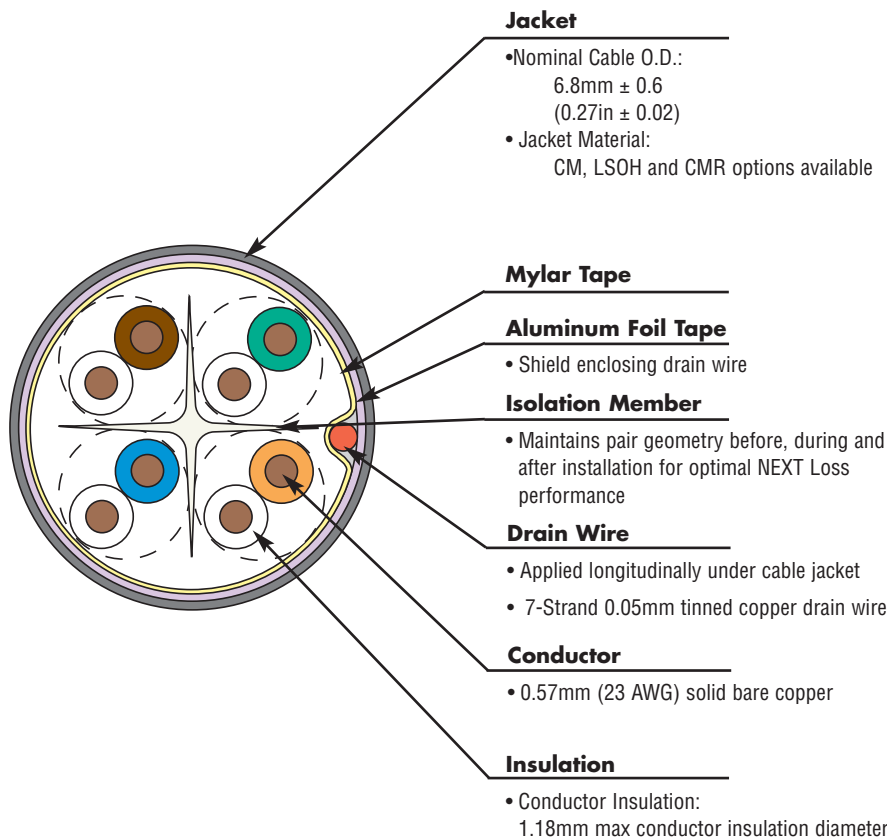


Siemon Category 6A F/UTP 4-Pair Cable (International)

Siemon's Category 6A F/UTP cable supports channel performance exceeding ANSI/TIA-568-C.2 and ISO/IEC 11801 Class E_A requirements. When combined with Siemon's Z-MAX 6A shielded connectivity, the result is a channel capable of supporting 10GBASE-T operation over 100-metre, 4-connector topologies. In addition the screened construction ensures virtually zero alien crosstalk. The Category 6A F/UTP cabling system supports emerging and converging IP applications like Voice Over IP (VoIP), IP video, remote powering and future 10 gigabit applications.

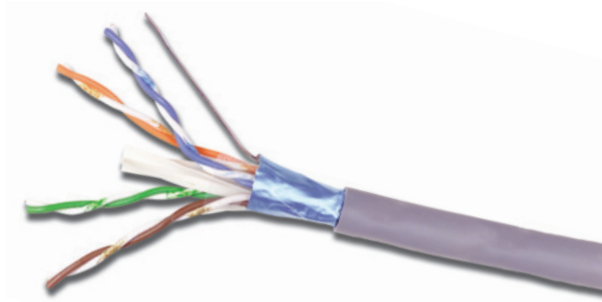

CONSTRUCTION

- Reverse sequential numbering
- Round jacket
- Center isolation member

COMPLIANCE


- ANSI/TIA-568-C.2
- IEC 61156-5 Ed 2.0
- ISO/IEC 11801 Ed 2.2
- UL CMR and CSA FT4
- UL CM, IEC 60332-1
- LSOH: IEC 60332-1, IEC 60332-3-22 IEC 60754, and IEC 61034

APPLICATIONS SUPPORT

- 10GBASE-T
- 100BASE-T
- HDBASE-T
- IEEE 802.3af (Poe)
- IEEE 802.3at (Poe+)
- 1000BASE-T
- 10BASE-T

Supports all applications designed for augmented category 6 or lower cabling

PRODUCT INFORMATION

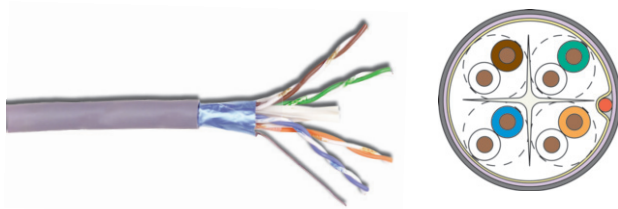

Ordering Information:

9A6(X)4-A5 305m Reel

Jacket Material

M = PVC (CM, IEC 60332-1), Grey Jacket

R = Riser (CMR, CSA FT4), Blue Jacket

L = LSOH (IEC 60332-1, IEC 60332-3-22), Violet Jacket

ELECTRICAL SPECIFICATIONS

DC Resistance	<8.5 Ω/100m
DC Resistance Unbalance	5%
Mutual Capacitance	5.6 nF/100m
Capacitance Unbalance	<330 pF/100m
Characteristic Impedance (ohms)	1-100 MHz: 100 ± 15% 100-750 MHz: 100 ± 22%
NVP	67%
TCL	30-10 log(f/100) dB
Delay Skey	≤45ns
PoE	Suitable for PoE & PoE +

PHYSICAL PROPERTIES

	LSOH	CM/CMR
Pulling Tension (max)	110N	110N
Bend Radius (min)	50mm	50mm
Installation Temperature	0 to 60°C	0 to 60°C
Storage Temperature	-20 to 75°C	-20 to 75°C
Operating Temperature	-20 to 75°C	-20 to 75°C

TRANSMISSION PERFORMANCE



GUARANTEED WORSE CASE



SIEMON TYPICAL

Frequency (MHz)	Insertion Loss (dB)		NEXT (dB)		PS NEXT (dB)		ACR (dB)		PSACR (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)		Propagation Delay (ns)	
	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical
1.0*	2.1	1.8	75.3	86.0	73.3	82.3	73.2	84.2	71.2	80.5	73.3	91.0	71.3	85.0	20.0	33.0	570	570
4.0	3.8	3.4	66.3	77.0	64.3	73.3	62.5	73.6	60.5	69.9	61.3	79.0	59.3	73.0	23.0	35.5	545	545
10.0	5.9	5.4	60.3	71.0	58.3	67.3	54.4	65.6	52.4	61.9	53.3	71.0	51.3	65.0	25.0	38.0	543	543
16.0	7.5	6.9	57.2	68.0	55.2	64.2	49.8	61.1	47.8	57.3	49.2	67.0	47.2	61.0	25.0	35.2	542	542
20.0	8.4	7.7	55.8	67.0	53.8	62.8	47.4	59.3	45.4	55.1	47.3	65.0	45.3	59.0	25.0	35.0	540	540.4
31.25	10.5	9.9	52.9	64.0	50.9	59.9	42.4	54.1	40.4	50.0	43.4	61.0	41.4	55.0	23.6	33.1	539	538.6
62.5	15.0	14.3	48.4	59.0	46.4	55.4	33.4	44.7	31.4	41.1	37.4	55.0	35.4	49.0	21.5	32.2	538	537.6
100.0	19.1	18.1	45.3	56.0	43.3	52.0	26.2	37.9	24.2	33.9	33.3	51.0	31.3	45.0	20.1	31.6	537	536.5
200.0	27.6	27.3	40.8	52.0	38.8	47.8	13.2	24.7	11.2	20.5	27.3	45.0	25.3	39.0	18.0	29.8	536	536.3
250.0	31.1	31.1	39.3	50.0	37.3	46.0	8.3	18.9	6.3	14.9	25.3	43.0	23.3	37.0	17.3	28.7	536	536.1
300.0	34.3	35.0	38.1	49.0	36.1	45.0	3.9	14.0	-1.9	10.0	23.8	38.0	21.8	35.0	17.3	28.0	536	535.8
400.0	40.1	40.0	36.3	47.0	34.3	43.0	-3.8	7.0	-5.8	3.0	21.3	36.0	19.3	33.0	17.3	27.1	536	535.6
500.0	45.3	42.0	34.8	47.0	32.8	42.0	-10.4	5.0	-12.4	0.0	19.3	34.0	17.3	32.0	17.3	26.0	536	510
550.0*	-	43.0	-	46.0	-	42.0	-	3.0	-	-1.0	-	33.0	-	31.0	-	26.0	536	-
625.0*	-	44.9	-	46.0	-	41.0	-	1.1	-	-3.9	-	33.0	-	29.0	-	25.0	535	-
750.0*	-	49.0	-	45.0	-	41.0	-	-4.0	-	-8.0	-	32.0	-	27.0	-	25.0	535	-

*Values for frequencies above industry requirements are for information only.

All performance based on 100 metres

**Worldwide Headquarters
North America**
Watertown, CT USA
Phone (1) 860 945 4200 US
Phone (1) 888 425 6165

**Regional Headquarters
EMEA**
Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

**Regional Headquarters
Asia/Pacific**
Shanghai, P.R. China
Phone (86) 21 5385 0303

**Regional Headquarters
Latin America**
Bogota, Colombia
Phone (571) 657 1950

**Siemon Interconnect
Solutions**
Watertown, CT USA
Phone (1) 860 945 4213 US
www.siemon.com/SIS