

SFP+ Twinax Copper Cable Assemblies

SFP+ active and passive copper cable assemblies from Siemon were developed specifically as a cost-effective alternative to optical modules for short reach links in high-speed interconnect applications such as high-performance computing (HPC), enterprise networking and network storage markets. These assemblies support data transfer rates up to 10+ Gb/s per lane, meeting or exceeding current standards specifications.

These SFP+ fully-shielded assemblies combine twin-axial shielded cable configuration with robust die cast housings for enhanced support of high frequency data rates. These SFP+ assemblies are impedance matched to ensure interoperability and minimize EMI leakage through their fully-shielded design.

The active cables use signal processing within the connector back shells to extend the length that copper cables can reach beyond the limits of passive copper solutions.

Multiple conductor sizes available

Enhanced EMI shielding for low emissions

Ultra low crosstalk for enhanced performance

Standard SFP+ latch interoperable with all compliant interfaces

Bend relief

STANDARDS COMPLIANCE

- Electrical: SFF-8431, SFF-8083
- Mechanical: SFF-8432
- EEPROM: SFF-8472
- RoHS

APPLICATIONS

- InfiniBand SDR, DDR and QDR
- Ethernet 1G, 10G and 40G
- Fiber Channel
- Rack-to-Rack, Top of Rack (TOR) and Core Switch
- Networking
- Storage
- Hubs, switches, routers, servers

PCB Termination

Four color options

Laser stripped conductors

Overmold provides additional strain relief to minimize pistoning


Automated welding for unmatched consistency

Welding results in less dielectric shrink-back than soldering

Product Information

PERFORMANCE SPECIFICATIONS

Electrical	
Min. Dielectric Withstand Voltage	300 VDC
Insulation Resistance	1000 Mohms
Current Rating	0.5 Amp Min/Signal Contact
Power Consumption (active cables only)	700mw Max
General	
Operating Temperature	-10 to 70°C (14 to 158°F)
Flammability Rating	UL 94 V-0
Green Features	RoHS, Lead-Free
Shield	Braid/Foil
Marking	Mfg Name, Part#, Date Code

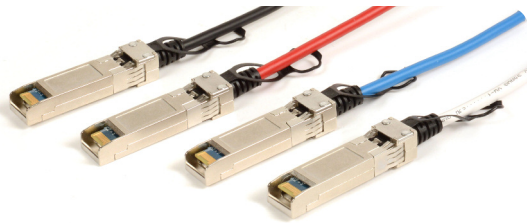

Plug	
Backshell Material	Nickel-Plated Zinc Diecast
Contact Material	PCB with Gold-Plated Pads
Latch	Positive Latching w/ Pull
Insertion Force	30N (6.7 lbf.) Max
Withdrawal Force	20N (4.5 lbf.) Max
Retention Force	90N (20.2 lbf.) Max
Durability	50 Cycles Min
Cable	
Conductor	Solid
Wire Gauge	30 AWG to 24 AWG
Impedance	100± 5 ohms
Construction	Twinaxial
Cable OD	30 AWG = 4.5mm (0.18 in.)
	28 AWG = 4.7mm (0.19 in.)
	24 AWG = 6.2mm (0.24 in.)
Jacket Type	PVC
Bend Radius	5X Cable OD

Ordering Information:

SFP+ Active/Passive Copper Cable Assembly, Double-ended

Part Number	Length	Gauge
SFPP30-00.3-(XX)	0.3m (1 ft.)	30
SFPP30-00.5-(XX)	0.5m (1.6 ft.)	30
SFPP30-01-(XX)	1m (3.3 ft.)	30
SFPP30-01.5-(XX)	1.5m (4.9 ft.)	30
SFPP30-02-(XX)	2m (6.6 ft.)	30
SFPP30-02.5-(XX)	2.5m (8.2 ft.)	30
SFPP30-03-(XX)	3m (9.8 ft.)	30
SFPP30-03.5-(XX)	3.5m (11.5 ft.)	30
SFPP30-04-(XX)	4m (13.1 ft.)	30
SFPP28-05-(XX)	5m (16.4 ft.)	28
SFPP24-07-(XX)	7m (23.0 ft.)	24
SFPPA28-07-(XX)*	7m (23.0 ft.)	28
SFPPA28-10-(XX)*	10m (32.8 ft.)	28

*= Active

Use (XX) to specify color: blank = black, 02 = white, 03 = red, 06 = blue
For example, SFPP30-01-03 is a red 3 meter cable.

Note: Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Color-Coded Cable Clips:

Our color-coded cable clips are designed to be highly visible, have a secure fit to the cable and easily field attachable to Siemon SFP+ cables. With 8 available colors to choose from, these color-coded cable clips provide Data Center Administrators the ability to customize their cables to clearly differentiate and identify various networks.

*Packaged 25 per bag.



Part# Description

CLIP-CBL-50-(XX)Color-coded cable clip, 30 and 28 AWG, bag of 25 clips

CLIP-CBL-62-(XX)Color-coded cable clip, 26 and 24 AWG, bag of 25 clips

Use (XX) to specify color:

02=white, 03=red, 04=gray, 05=yellow, 06=blue, 07=green, 08 = violet, 09 = orange

Worldwide Headquarters North America

Watertown, CT USA
Phone (1) 860 945 4200 US
Phone (1) 888 425 6165

Regional Headquarters EMEA

Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

Regional Headquarters Asia/Pacific

Shanghai, P.R. China
Phone (86) 21 5385 0303

Regional Headquarters Latin America

Bogota, Colombia
Phone (571) 657 1950

Siemon Interconnect Solutions

Watertown, CT USA
Phone (1) 860 945 4213 US
www.siemon.com/SIS