


QSFP28 to 4 SFP28 25/100G Passive Copper Assemblies

Siemon Interconnect Solutions QSFP28 to 4 SFP28 Passive Copper Cable assemblies exceed 100G Ethernet (100GBASE-CR4) specifications. They are designed for high-density applications, offering a cost-effective, low-power option for high-speed data center interconnects. This next generation product shares the same mating interface with QSFP+ (SFF-8436) and SFP+ (SFF-8431) form factors, making it backward compatible with existing QSFP+ and SFP+ equipment ports. These direct attach cable assemblies are available in standard lengths up to 5 meters (16.4 ft.) for 100G 4x25G Ethernet applications.

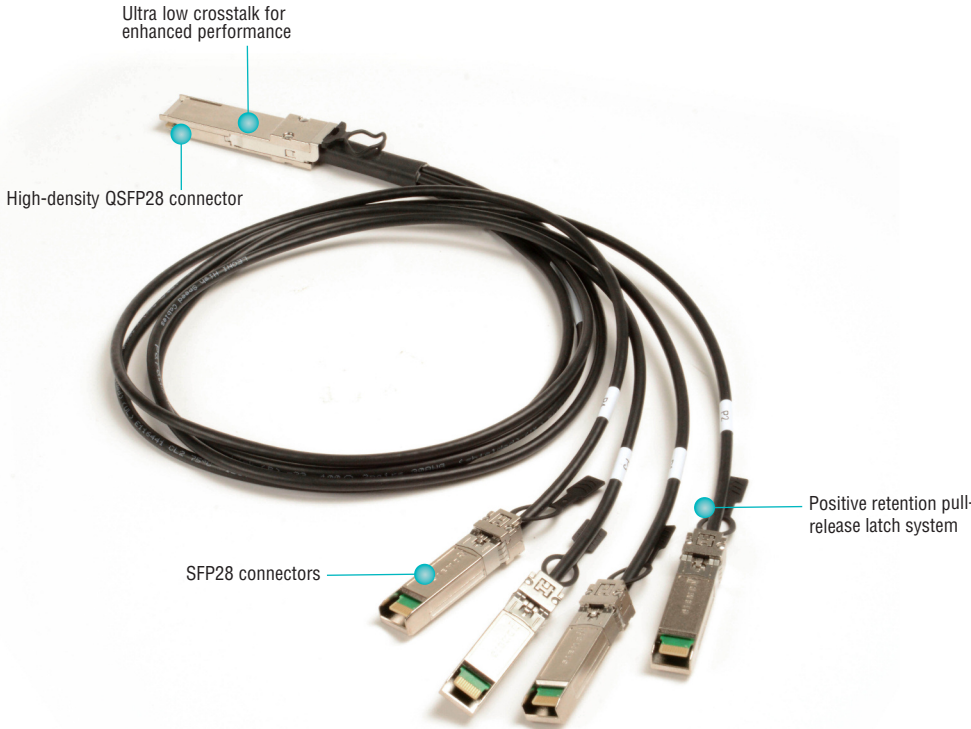


STANDARDS COMPLIANCE

- Electrical: IEEE 802.3by, IEEE 802.3bj
- SFP28: SFF-8402, SFF-8419, SFF-8437, SFF-8472
- QSFP28: SFF-8636, SFF-8661, SFF-8665, SFF-8679
- RoHS

APPLICATIONS

- Ethernet 10G, 25G, 40G, 100G (25GBASE-CR, 100GBASE-CR4)
- Intra-Rack System, Top of Rack (ToR), Middle of Rack (MoR)
- Switch, Storage, Server, NIC
- Switch-to-Switch, Switch-to-Server

PCB Termination

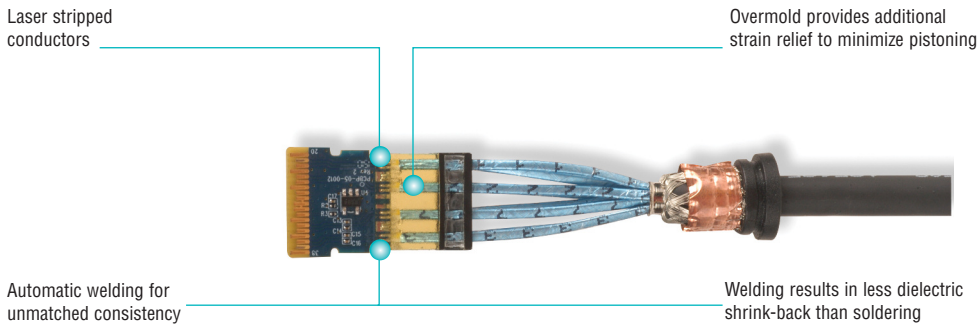

Product Information

PERFORMANCE SPECIFICATIONS

Electrical	
Min. Dielectric Withstand Voltage	300 VDC
Insulation Resistance	1000 MΩ
Current Rating	0.5 Amp Min/Signal Contact
General	
Operating Temperature	-5 to 70° C (32 to 158° F)
Flammability Rating (Plastics)	UL 94
Green Features	RoHS, Lead-Free
Shield	Braid/Foil
Marking	Mfg Name, Part#, Date Code

Plug	
Backshell Material	Nickel Plated Zinc Diecast
Contact Material	PCB with Gold-Plated Pads
Latch	Positive Latching with Nylon Pull Tab
Insertion Force	QSFP28: 40N (9.0 lbf.) Max SFP28: 18N (4.0 lbf.) Max
Withdrawal Force	QSFP28: 30N (6.7 lbf.) Max SFP28: 12.5N (2.8 lbf.) Max
Retention Force	90N (20.2 lbf.) Min
Durability	QSFP28: 250 Cycles Min SFP28: 250 Cycles Min
Cable	
Conductor	Solid
Wire Gauge	30 AWG and 26 AWG
Impedance	100 +/- 10 ohms
Construction	Twinaxial
Cable OD	30 AWG = 4.1mm (0.16 in.)
	26 AWG = 4.8mm (0.18in.)
Jacket Type	PVC
Bend Radius	5X Cable OD - Single 10X Cable OD - Repeated
Color	Black

Ordering Information:

QSFP28 to 4 SFP28 Passive Copper Cable Assemblies

Part Number	Length	Gauge
Q4S28P300.5-01P	0.5m (1.6 ft.)	30
Q4S28P301.0-01P	1m (3.3 ft.)	30
Q4S28P301.5-01P	1.5m (4.9 ft.)	30
Q4S28P302.0-01P	2m (6.6 ft.)	30
Q4S28P262.5-01P	2.5m (8.2 ft.)	26
Q4S28P263.0-01P	3m (9.8 ft.)	26
Q4S28P265.0-01P*	5m (16.4 ft.)	26

All cables compliant to IEEE 802.3by, CA-N. Will work with or without FEC unless otherwise noted.

*Compliant to IEEE 802.3bj, CA-L. Will work with RS-FEC.

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters North America

Watertown, CT USA
Phone (1) 860 945 4200

Regional Headquarters Europe Russia Africa

Chertsey, Surrey, England
Phone (44) 0 1932 571771

Regional Headquarters China

Shanghai, P.R. China
Phone (86) 215385 0303

Regional Headquarters Latin America

Bogota, Colombia
Phone (571) 657 1950/51/52

Regional Headquarters India Middle East

Dubai, United Arab Emirates
Phone (971) 4 3689743

Regional Headquarters Asia Pacific

Sydney, Australia
Phone (86) 21 5385 0303

Siemon Interconnect Solutions

Watertown, CT USA
Phone (1) 860 945 4213 US
www.siemon.com/SIS