




TERA® E10 CABLE — INTERNATIONAL

Siemon's fully shielded TERA end-to-end cabling solution is the highest-performing, most secure twisted-pair copper cabling system available. Siemon's TERA E10 SFTP cable perfectly complements the performance of the TERA outlet exceeding all ISO/IEC requirements for Category 7_A/Class F_A transmission performance. A fully shielded cable with individual foils around each pair coupled with a high screen coverage outer braid provides perfect immunity from outside interferences. In addition, the cable jacket has been qualified for mechanical reliability in high temperature environments up to 75°C. In PoE remote power applications, this cable can be installed in environments up to 60°C and will not experience degradation due to heat rise inside the cable bundle. Further, this 7A cable is capable of running multiple lower speed applications, known as cable sharing, from one drop. Siemon cable is the ideal way to ensure optimum channel performance and is essential for a complete end-to-end warranted solution.

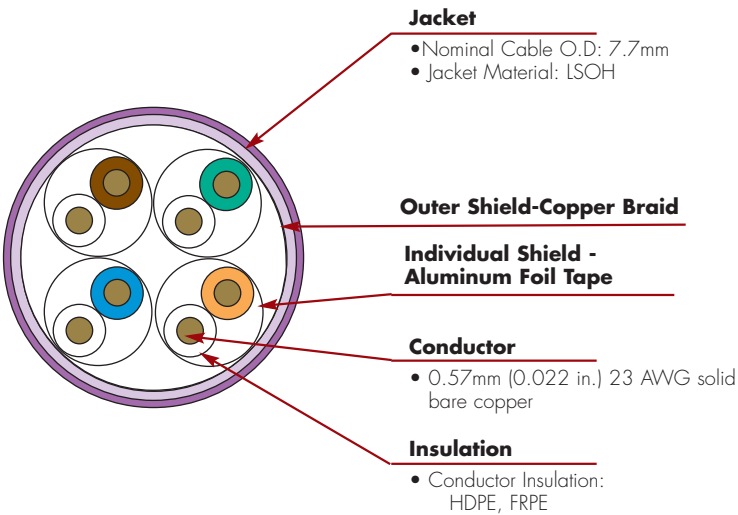

CONSTRUCTION

- S/FTP
- Sequential measurement markings on jacket
- Pairs individually shielded with aluminum-polyester foil
- Overall tinned-copper braid

COMPLIANCE

- IEC 61156-5 Ed 2.0 (Category 7_A)
- ISO/IEC 11801: Ed 2.2
- EN 50288 • EN55022
- EN 50173 • EN55024
- IEEE 802.3an
- LSOH: IEC 60332-1, IEC 60754, and IEC 61034

ETHERNET APPLICATIONS SUPPORT

- 10GBASE-T
- 1000BASE-T
- 100BASE-T
- 10BASE-T

PRODUCT INFORMATION

ELECTRICAL SPECIFICATIONS

DC Resistance	7.32 Ω/100m
DC Resistance Unbalance	≤ 2%
Mutual Capacitance	5.6 nF/100m
Capacitance Unbalance	≤160 pF/100m
Characteristic Impedance (ohms)	1-100 MHz: 100 ± 15% 100-250 MHz: 100 ± 22% 250-1000 MHz: 100± 22%
NVP	70%
LCL	40-10 x log(f)dB
Delay Skew	25ns/100m

PHYSICAL PROPERTIES

	LSOH
Pulling Tension (max)	110N
Bend Radius (min)	8x O.D.
Installation Temperature	0 to 60°C
Storage Temperature	-20 to 75°C
Operating Temperature	-20 to 75°C

TRANSMISSION PERFORMANCE

IEC 61156-5

SIEMON TYPICAL

Frequency (MHz)	Insertion Loss (dB)		NEXT (dB)		PS NEXT (dB)		ACR (dB)		PSACR (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)		Propagation Delay (ns)	
1.0*	1.9	1.6	78.0	105.0	75.0	102.0	76.1	103.0	73.1	100.0	77.0	96.0	75.0	94.0	20.0	31.0	536	512
4.0	3.5	3.0	78.0	105.0	75.0	102.0	74.6	102.0	71.6	99.0	77.0	96.0	75.0	94.0	23.0	34.0	518	494
10.0	5.4	4.9	78.0	105.0	75.0	102.0	72.6	100.0	69.6	97.0	74.0	96.0	71.0	94.0	25.0	35.0	511	487
16.0	6.8	6.3	78.0	105.0	75.0	102.0	71.2	99.0	68.2	96.0	70.0	96.0	67.0	94.0	25.0	35.0	509	485
20.0	7.6	7.0	78.0	105.0	75.0	102.0	70.3	98.0	67.4	95.0	68.0	96.0	65.0	94.0	25.0	35.0	508	484
31.25	9.6	8.9	78.0	105.0	75.0	102.0	68.5	96.0	65.5	93.0	64.0	93.0	61.0	91.0	23.6	34.0	506	482
62.5	13.7	12.8	78.0	105.0	75.0	102.0	64.3	92.0	61.3	89.0	58.0	88.0	55.0	86.0	21.5	32.0	505	481
100.0	17.5	16.5	76.0	105.0	73.0	102.0	58.5	89.0	55.5	86.0	54.0	82.0	51.0	80.0	20.1	31.0	504	480
200.0	25.3	23.5	71.0	102.0	68.0	100.0	46.2	79.0	43.2	77.0	48.0	78.0	45.0	75.0	18.0	29.0	503	479
250.0	28.5	28.2	70.0	102.0	67.0	100.0	41.5	74.0	38.5	72.0	46.0	75.0	43.0	70.0	17.3	28.0	502	502
300.0	31.5	28.9	69.0	102.0	66.0	97.0	37.3	73.0	34.3	68.0	44.0	70.0	41.0	68.0	17.3	28.0	502	478
350.0	34.3	31.5	68.0	100.0	65.0	97.0	33.6	69.0	30.6	66.0	43.0	70.0	40.0	63.0	17.3	28.0	502	478
400.0	36.9	33.1	67.0	95.0	64.0	93.0	30.1	62.0	27.1	60.0	42.0	66.0	39.0	59.0	17.3	28.0	502	478
550.0	44.1	40.2	65.0	95.0	62.0	93.0	20.8	55.0	17.8	53.0	39.0	60.0	36.0	56.0	17.3	28.0	502	478
600.0	46.3	41.7	64.0	95.0	61.0	93.0	18.0	53.0	15.0	51.0	38.0	55.0	35.0	53.0	17.3	28.0	502	478
800.0	54.5	47.6	62.0	90.0	59.0	87.0	7.9	42.0	4.9	39.0	36.0	47.0	33.0	44.0	16.1	28.0	501	477
1000.0	62.0	54.5	61.0	85.0	58.0	83.0	-1.0	31.0	-4.0	29.0	34.0	40.0	31.0	38.0	15.1	27.0	501	477
1200.0*		59.8		80.0		77.0		20.0		17.0		35.0		33.0		27.0		477

*Values below 4 MHz are informational only.

**Values for IEC 61156-5 above 1000 MHz are for information only

All performance based on 100 metres.

TERA® E10 MHz 4-Pair Solid S/FTP Cable:

- 9T7L4-E10LSOH (IEC 60332-1), Violet Jacket, 305m
- 9T7L4-E10-5CRLSOH (IEC 60332-1), Violet Jacket, 500m
- 9T7L4-E10-1KRLSOH (IEC 60332-1), Violet Jacket, 1000m

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

TERA® is a trademark of Siemon

For related product information request Spec Sheet(s):

- TERA Outlets (PROD-SS-TRAO)
- TERA Patch Panels (PROD-SS-TRAPP)
- TERA Patch Cords (PROD-SS-TRAPC)
- TERA S/FTP Trunking Cable Assemblies (PROD-SS-TRATC)

North America
Watertown, CT USA
Phone (1) 860 945 4200 US
Phone (1) 888 425 6165 Canada

Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

Asia/Pacific
Shanghai, P.R. China
Phone (86) 21 5385 0303

Latin America
Bogota, Colombia
Phone (571) 657 1950