

S110[®] 5 -Pair Termination Tool

- Seats 3-, 4-, and 5-pair 110 blocks
- Replaceable head and cutting blades
- Terminates wires on both the cable and the cross-connect side of 110 blocks
- Compact design can be used with disconnect or modular jack panel 110 blocks
- Ergonomically designed handle



1 To remove the head of the tool for blade replacement, twist and pull the head from the tool bo



2 Slide the trimming blades and wire seating assembly out of tool head.

Caution: Blades are extremely sharp. Exercise caution when handling.




3 Remove the cutting blades from the assembly. Rotate 180° and place back into position.



4 Slide the combined trimming blade/seating assembly back into position inside the tool head. Examine the assembly to ensure proper alignment of all components.



5 Snap the head onto the shaft of the tool and rotate it until it locks into position.

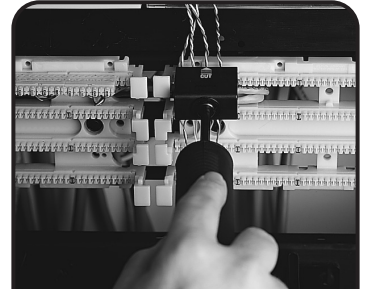

6 Terminate and trim the conductors into the 110 wiring base using the cutting edge of the tool.



7 Insert a 110C connecting block into the head of the tool, carefully align over the wiring base and punch down on the block.



8 Lace cross-connect cable into the 110C block and terminate.

Ordering Information

Ordering Information

S788J5H5-pair Replacement head
S788J5B.....5-pair Cutting blades
S788J4H4-pair Replacement head
S788J4B.....4-pair Cutting blades

To assist safe installations, comply with the following:

- A. Use caution when installing or modifying telecommunications circuits.
- B. Never touch uninsulated wire terminals unless the circuit has been disconnected.
- C. Never install this device in a wet location.
- D. Never install wiring during a lightning storm.



Worldwide Headquarters North America

Watertown, CT USA
Phone (1) 860 945 4200 US
Phone (1) 888 425 6165

Regional Headquarters EMEA

Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

Regional Headquarters Asia/Pacific

Shanghai, P.R. China
Phone (86) 21 5385 0303

Regional Headquarters Latin America

Bogota, Colombia
Phone (571) 657 1950